
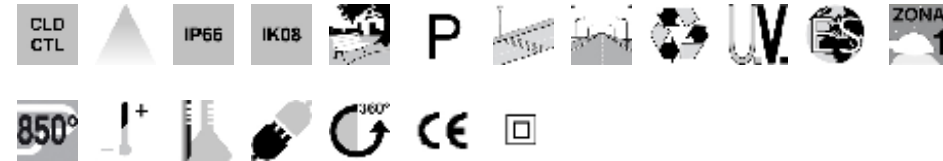


3240 Modoled POWERLED

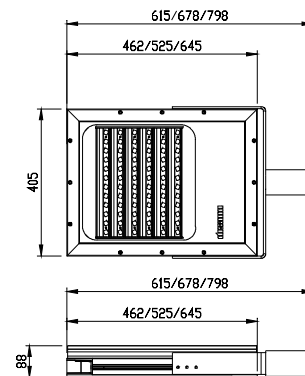

Code	Gear	Kg	Colour	Dimensions	lamp
330000-00	CLD CTL	10.00	Black Oxidized	462x405x88	LED 48x1.2W white-7000lm-4000K-Ra 80
330001-00	CLD CTL	15.00	Black Oxidized	525x405x88	LED 72X1.2W white-10512lm-4000K-Ra 80
330002-00	CLD CTL	20.00	Black Oxidized	645x405x88	LED 96X1.2W white-14000lm-4000K-Ra 80

Housing: in extruded aluminium with incorporated heat sink to guarantee LED durability.

Optics: in high-efficiency, metal-coated V0 polycarbonate, matt finish and micro-facetted to reduce direct glare.

LED: complete with latest-generation LED sources. The overall efficiency of the lighting fixture is close to 100%. Each LED module is equipped with a highly efficient lens and is designed to last 50,000 hours. LED 48/72/96 x 1.2w cad. Ra80 79/118/158W tot. (530mA) - 4000K

Heat sink: the heat dissipation system is specially designed and made to allow the operation of the LED lights with temperatures below 50° (Ta = 25°), thus guaranteeing excellent performance/efficiency and durability.