



2100 Kendo

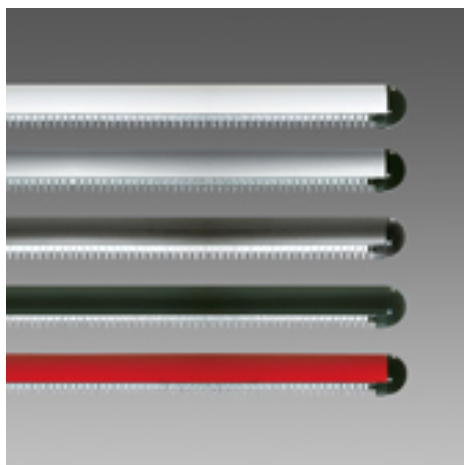

100



Code	Gear	Kg	Colour	Dimensions	Total Installed Power Capacity	lamp
146241-00	CNR	1.85	white		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146541-00	CNR	1.85	met. grey		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146641-00	CNR	1.85	black		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146741-00	CNR	1.85	green		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146841-00	CNR	1.85	red		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146244-00	CNR	1.85	al. track		26	FL 1x18-G13-1350lm-4000K-Ra 1b
146242-00	CNR	2.75	white		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146542-00	CNR	2.75	met. grey		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146642-00	CNR	2.75	black		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146742-00	CNR	2.75	green		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146842-00	CNR	2.75	red		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146245-00	CNR	2.75	al. track		43	FL 1x36-G13-3350lm-4000K-Ra 1b
146243-00	CNR	3.70	white		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146543-00	CNR	3.70	met. grey		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146643-00	CNR	3.70	black		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146743-00	CNR	3.70	green		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146843-00	CNR	3.70	red		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146246-00	CNR	3.70	al. track		67	FL 1x58-G13-5200lm-4000K-Ra 1b
146351-00	CNR-E	3.75	white		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b
146245-07	CNR-E	3.75	met. silver		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b
146354-00	CNR-E	3.75	met. grey		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b

Code	Gear	Kg	Colour	Dimensions	Total Installed Power Capacity	lamp
146355-00	CNR-E	3.75	black		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b
146356-00	CNR-E	3.75	green		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b
146357-00	CNR-E	3.75	red		44,8	FL 1x36-G13-3350lm-4000K-Ra 1b
146451-00	CNR-E	4.70	white		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146246-07	CNR-E	4.70	al. track		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146454-00	CNR-E	4.70	met. grey		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146455-00	CNR-E	4.70	black		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146456-00	CNR-E	4.70	green		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146457-00	CNR-E	4.70	red		68,8	FL 1x58-G13-5200lm-4000K-Ra 1b
146231-00	CEL	1.60	white		39	FL 1x18-G13-1350lm-4000K-Ra 1b
146234-00	CEL	1.60	al. track		18	FL 1x18-G13-1350lm-4000K-Ra 1b
146235-00	CEL	1.60	black		18	FL 1x18-G13-1350lm-4000K-Ra 1b
146236-00	CEL	1.60	green		18	FL 1x18-G13-1350lm-4000K-Ra 1b
146237-00	CEL	1.60	red		18	FL 1x18-G13-1350lm-4000K-Ra 1b
146244-08	CEL	1.60	al. track		18	FL 1x18-G13-1350lm-4000K-Ra 1b
146331-00	CEL	2.60	white		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146334-00	CEL	2.60	met. grey		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146335-00	CEL	2.60	black		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146336-00	CEL	2.60	green		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146337-00	CEL	2.60	red		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146245-08	CEL	2.60	al. track		35	FL 1x36-G13-3350lm-4000K-Ra 1b
146431-00	CEL	3.10	white		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146434-00	CEL	3.10	met. grey		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146435-00	CEL	3.10	black		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146436-00	CEL	3.10	green		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146437-00	CEL	3.10	red		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146246-08	CEL	3.10	al. track		56	FL 1x58-G13-5200lm-4000K-Ra 1b
146331-51	CEL-D	2.60	white		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146334-51	CEL-D	2.60	met. grey		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146335-51	CEL-D	2.60	black		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146336-51	CEL-D	2.60	green		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146337-51	CEL-D	2.60	red		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146245-51	CEL-D	2.60	al. track		37	FL 1x36-G13-3350lm-4000K-Ra 1b
146431-51	CEL-D	3.10	white		55	FL 1x58-G13-5200lm-4000K-Ra 1b
146434-51	CEL-D	3.10	met. grey		55	FL 1x58-G13-5200lm-4000K-Ra 1b
146435-51	CEL-D	3.10	black		55	FL 1x58-G13-5200lm-4000K-Ra 1b
146436-51	CEL-D	3.10	green		55	FL 1x58-G13-5200lm-4000K-Ra 1b
146437-51	CEL-D	3.10	red		55	FL 1x58-G13-5200lm-4000K-Ra 1b
146246-51	CEL-D	3.10	al. track		55	FL 1x58-G13-5200lm-4000K-Ra 1b

Code	Gear	Kg	Colour	Dimensions	Total Installed Power Capacity	lamp
146331-52	CEL-D		white	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146334-52	CEL-D		met. grey	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146335-52	CEL-D		black	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146336-52	CEL-D		green	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146337-52	CEL-D		red	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146245-52	CEL-D		al. track	1250x100x100	36	FL 1x36-G13-3350lm-4000K-Ra 1b
146461-52	CEL-D		white	1550x100x100		FL 1x58-G13-5200lm-4000K-Ra 1b
146434-52	CEL-D		met. grey	1550x100x100	56	FL 1x58-G13-5200lm-4000K-Ra 1b
146435-52	CEL-D		black	1550x100x100	56	FL 1x58-G13-5200lm-4000K-Ra 1b
146436-52	CEL-D		green	1550x100x100	56	FL 1x58-G13-5200lm-4000K-Ra 1b
146437-52	CEL-D		red	1550x100x100	56	FL 1x58-G13-5200lm-4000K-Ra 1b
146246-52	CEL-D		al. track	1550x100x100	56	FL 1x58-G13-5200lm-4000K-Ra 1b

Housing: In extruded aluminium, circular section Ø 100.

Reflector: In steel pre-painted with white polyester resin, anti-yellowing, with electric gear on top.

Painting: Spray coated with a UV-stabilised acrylic water-based paint, UV-stabilized, upon chromate treatment.

Lampholder: In white polycarbonate, with contacts in phosphor bronze. Socket G13.

Electric gear: 230V/50Hz power supply. Hard wire, 0.50 sqmm cross section, and PVC-HT sheath, resistant up to 90°C, according to CEI 20-20 standards. 2P + T terminal block, with maximum allowed lead cross section of 2.5 sqmm.

Standard supply: Electric gear mounted on removable battens for easy maintenance. The reflector remains hooked to the housing by means of nylon cords.

Mounting: Suspension or ceiling mounting.

Regulations: Produced according to applicable EN60598-1 CEI 34-21 standards, IP40IK08 degree of protection according to EN 60529 standards and approved by the Italian Body for Quality Marking (IMQ).

They have obtained the ENEC European Certificate of Conformity. These products can be installed on normally inflammable surfaces.

Special electric gear: Electronic ballast for all versions, keeping the fixture length unchanged.

Emergency kit for all versions, except for 18 W version, keeping the fixture length unchanged.

Emergency light version: If a black-out occurs, lamp connected to the emergency circuit will stay on, thus avoiding the inconvenience caused by a sudden absence of all light. It has a 60-minute emergency run time.

When power is restored, the battery recharges automatically.